SBX CUSTOM BOX-RECESSED


SAMPLE SPECIFICATION specify as: SOFTFORMS[®] Model # SBX

Pittcon SOFTFORMS®LLC

6409 Rhode Island Avenue Riverdale, MD 20737 (800) 637-7638 (301) 927-1000 Fax: (301) 699-8690 3330 W. Flower Street Phoenix, AZ 85017 (800) 637-7638 (602) 233-9100 Fax: (602) 233-9400

The formed aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The fins shall be 1-1/4" wide nominal. The formed profile shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

MATERIAL:	Aluminum alloy	3003 H-14 or equal
	Finish	Factory primed
	Metal thickness	062" typical

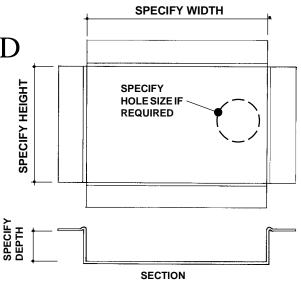


SBX NO SCALE

RECESSED BOX PLAN & SECTION

EXAMPLE DETAIL


For use with conventional metal stud construction and 1/2" or 5/8" GPDW.

The SBX may be specified in any dimension and is useful as a recessed switch/control box. Holes in the back plate can be punched to meet your requirements. Screws through the grooved fins must always engage metal or wood substructure to ensure proper installation.

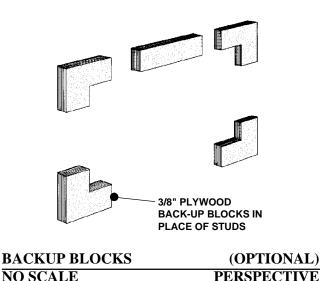

All details, methods and specifications are the exclusive property of Pittcon Softforms[®] LLC. Pittcon reserves the right to change any specifications or details without prior notification. All Softforms[®] profiles are available in standard 10' lengths $\pm 1/8$ " (2.048 M). Other lengths are available as special order items. For custom shapes, sizes, or for special finishes, please contact the factory or your nearest Pittcon sales representative.

© 2008 Pittcon SOFTFORMS* LLC.

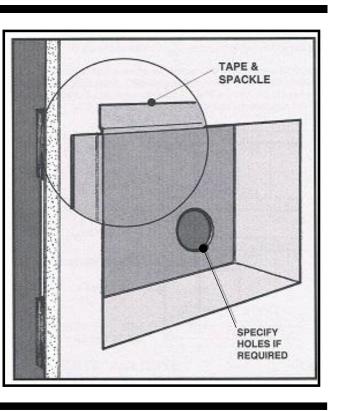

Softforms

PREFORMED ARCHITECTURAL PROFILES FOR DRYWALL CONSTRUCTION