

# SO-45A

## 45° OUTSIDE CORNER


### SAMPLE SPECIFICATION

specify as: SOFTFORMS® Model # SO-45A

#### Pitcon SOFTFORMS® LLC

6409 Rhode Island Avenue	3330 W. Flower Street
Riverdale, MD 20737	Phoenix, AZ 85017
(800) 637-7638	(800) 637-7638
(301) 927-1000	(602) 233-9100
Fax: (301) 699-8690	Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. The tapered fins shall be punched with holes staggered to accept standard screw fastening. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

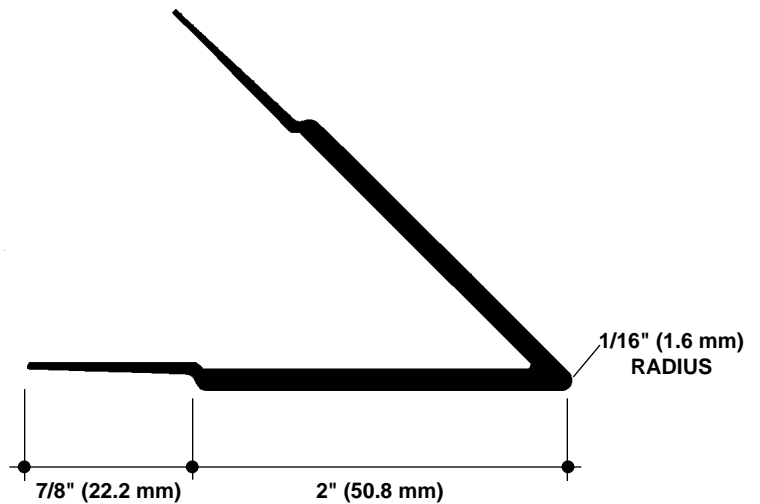

MATERIAL: Aluminum alloy.....6063 T5 or equal  
Finish.....Factory primed

SO-45A

45° OUTSIDE CORNER


NO SCALE

SECTION

### EXAMPLE DETAIL

For use with conventional metal stud construction and 1/2" or 5/8" GPDW.


The SO-45A provides a true and durable 45° corner. Screws through the grooved fins must always engage metal or wood substructure to ensure proper installation.

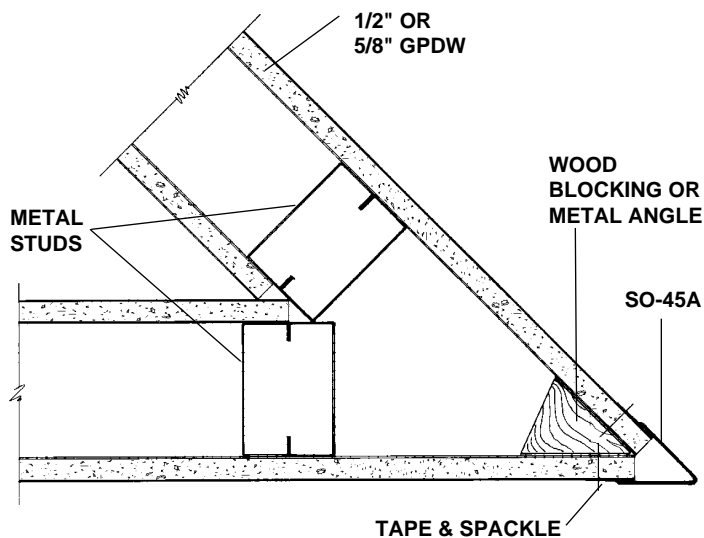

SO-45A + STUD WALL

NO SCALE

PLAN/SECTION

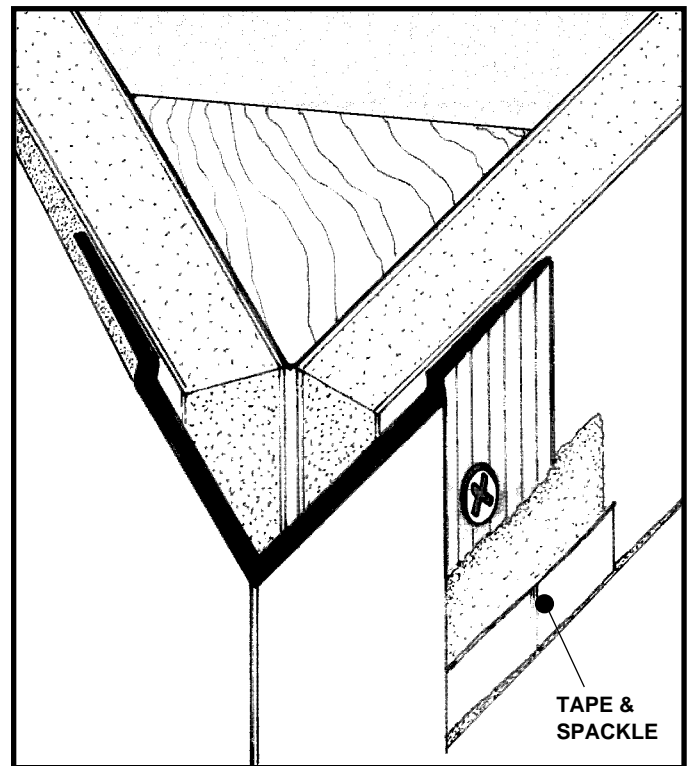

All details, methods and specifications are the exclusive property of Pitcon Softforms® LLC. Pitcon reserves the right to change any specifications or details without prior notification. All Softforms® profiles are available in standard 10' lengths ±1/8" (2.048 M). Other lengths are available as special order items. For custom shapes, sizes, or for special finishes, please contact the factory or your nearest Pitcon sales representative.

# Softforms®

PREFORMED ARCHITECTURAL PROFILES  
FOR DRYWALL CONSTRUCTION