

SCS-3X

CUSTOM CORNER STEP

SAMPLE SPECIFICATION

specify as: SOFTFORMS® Model # SCS-3X

Pitcon SOFTFORMS® LLC


6409 Rhode Island Avenue
Riverdale, MD 20737
(800) 637-7638
(301) 927-1000
Fax: (301) 699-8690

3330 W. Flower Street
Phoenix, AZ 85017
(800) 637-7638
(602) 233-9100
Fax: (602) 233-9400

The formed aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The formed profile shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

MATERIAL: Aluminum alloy.....3003 H-14 or equal
Finish.....Factory primed
Metal Thickness......090" typical

Note: Other thicknesses ranging from .062" to .125" are available upon request, with some restrictions applying. Check factory for your needs.

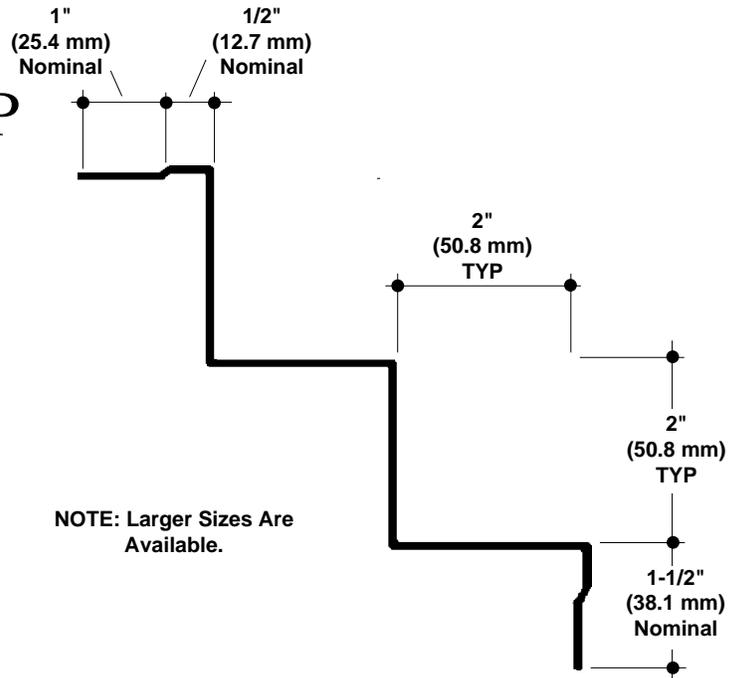


SCS-3X
NO SCALE

TRIPLE CORNER STEP
SECTION

EXAMPLE DETAIL


For use with 1/2" or 5/8" GPDW ceilings.

The SCS-3X may be used horizontally or vertically to create a multistep corner in widths specified. Screws through the tapered fins must always engage metal or wood substructure to ensure proper installation.

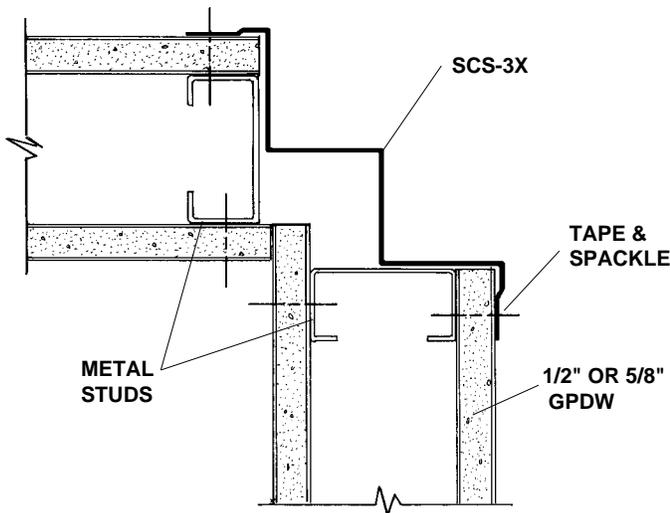

SCS-3X
NO SCALE

STUD WALL
PLAN/SECTION

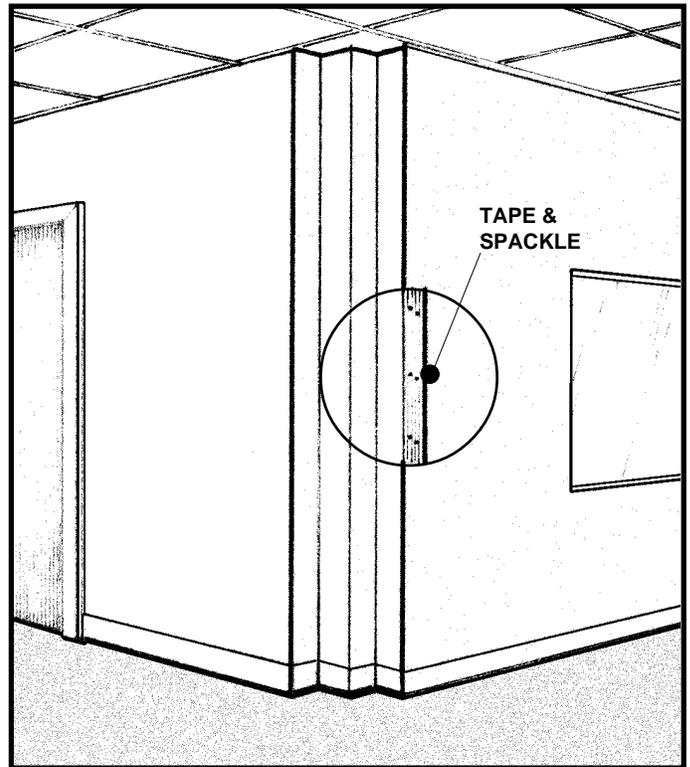

All details, methods and specifications are the exclusive property of Pitcon Softforms® LLC. Pitcon reserves the right to change any specifications or details without prior notification. All Softforms® profiles are available in standard 10' lengths ±1/8" (2.048 M). Other lengths are available as special order items. For custom shapes, sizes, or for special finishes, please contact the factory or your nearest Pitcon sales representative.