

SWR-V SERIES

'V' GROOVE WALL REVEALS

SAMPLE SPECIFICATION

specify as: SOFTFORMS® Model # SWR-XXXV-XXX


Pittcon SOFTFORMS® LLC

6409 Rhode Island Avenue
Riverdale, MD 20737
(800) 637-7638
(301) 927-1000
Fax: (301) 699-8690

3330 W. Flower Street
Phoenix, AZ 85017
(800) 637-7638
(602) 233-9100
Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. The tapered fins shall be punched with holes staggered to accept standard screw fastening. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

MATERIAL: Aluminum alloy.....6063 T5 or equal
Finish.....Factory primed

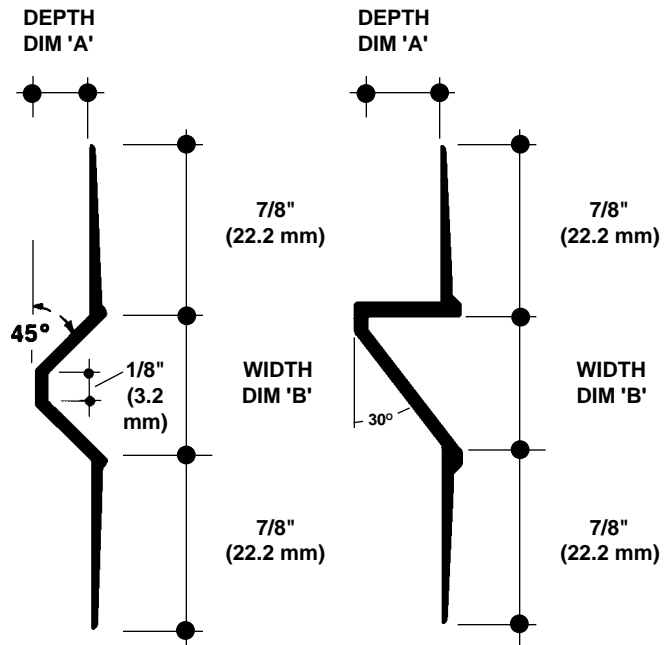

SWR-V SERIES
NO SCALE

SWR-VS SERIES
TYPICAL SECTIONS

SELECTING YOUR SOFTFORMS® SWR-V SERIES OF WALL/TRIM REVEALS


Select proper SOFTFORMS wall reveal from the information below.

SWR-V Model No.	DEPTH Dim 'A'	WIDTH Dim 'B'
SWR-075V-050	9/32" (7.1 mm)	3/4" (19.1 mm)
SWR-100V-050	13/32" (10.3 mm)	1" (25.4 mm)
SWR-063VS-050	11/32" (8.7 mm)	5/8" (15.9 mm)

EXAMPLE DETAIL

For use with conventional metal stud construction with 1/2" or 5/8" GPDW sheets.

The SWR-V SERIES produces a rusticated look: courses of V-joint "blocks" reminiscent of monumental stone buildings. The extrusion can be used vertically or horizontally. Screws through the grooved fins must always engage with metal or wood substructure including horizontal bracing to ensure proper installation.

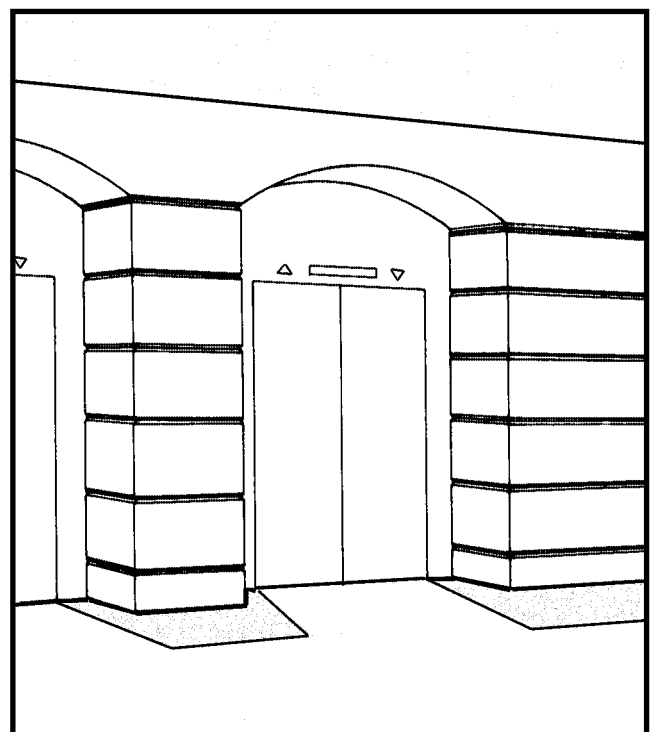

Special custom sizes are also available. Check with factory for availability and lead time.

All details, methods and specifications are the exclusive property of Pittcon Softforms® LLC. Pittcon reserves the right to change any specifications or details without prior notification. All Softforms® profiles are available in standard 10' lengths ±1/8" (2.048 M). Other lengths are available as special order items. For custom shapes, sizes, or for special finishes, please contact the factory or your nearest Pittcon sales representative.

Softforms

PREFORMED ARCHITECTURAL PROFILES
FOR DRYWALL CONSTRUCTION