
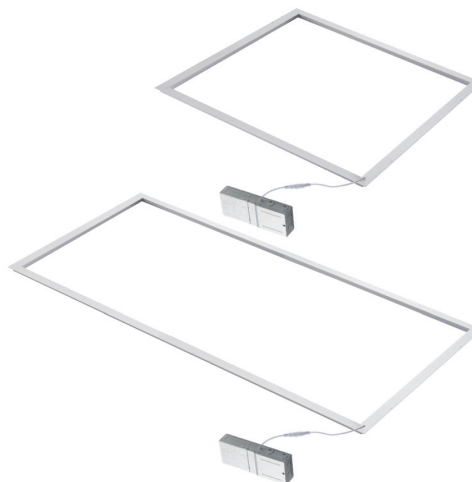


T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

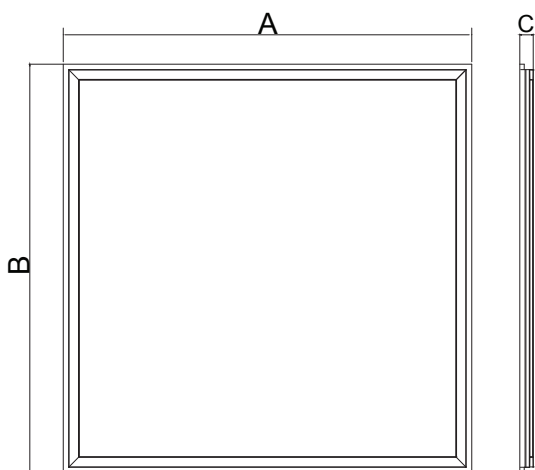

| Dimensions | A | B | C |
|------------|-----------------|----------------|--------------|
| 2x2 | 23.74" (603mm) | 23.74" (603mm) | 0.59" (15mm) |
| 2x4 | 47.76" (1213mm) | 23.74" (603mm) | 0.59" (15mm) |

| Size | Wattage Adjustment | CCT Adjustment |
|------|--------------------|-----------------|
| 2x2 | 20/30/40W | 3500/4000/5000K |
| 2x4 | 40/50/60W | 3500/4000/5000K |

Features

- Ideal replacement for traditional flat panels and troffers
- Non-flicker, no dark spots
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Dry locations
- 5 year limited warranty

Residential Applications

- Kitchens
- Bathrooms
- Laundry rooms
- Pantries
- Rec Rooms

Commercial Applications

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

Specifications

| | |
|-----------------------|--|
| Color Temperature | 3500/4000/5000K adjustable |
| Input Voltage | AC100-277V |
| Power Consumption (W) | 2X2=20/30/40 watts adjustable 2X4=40/50/60 watts adjustable |
| Lumen Output | 2X2=2200-4400LM 2X4=4400-6600LM |
| CRI | >80 |
| LED Life | 50,000 hours |
| Dimmable | 0-10V |
| Beam angle | 120° |
| Approvals | cETLus, DLC |


Ordering Code

TLE-2X2-K40-3050
TLE-2X4-K60-3050

| | | | |
|---------|--|---------|--|
| Project | | Type | |
| Date | | Contact | |
| Notes | | | |

T-LED Edge Light CCT

T-LED Edge Light CCT is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

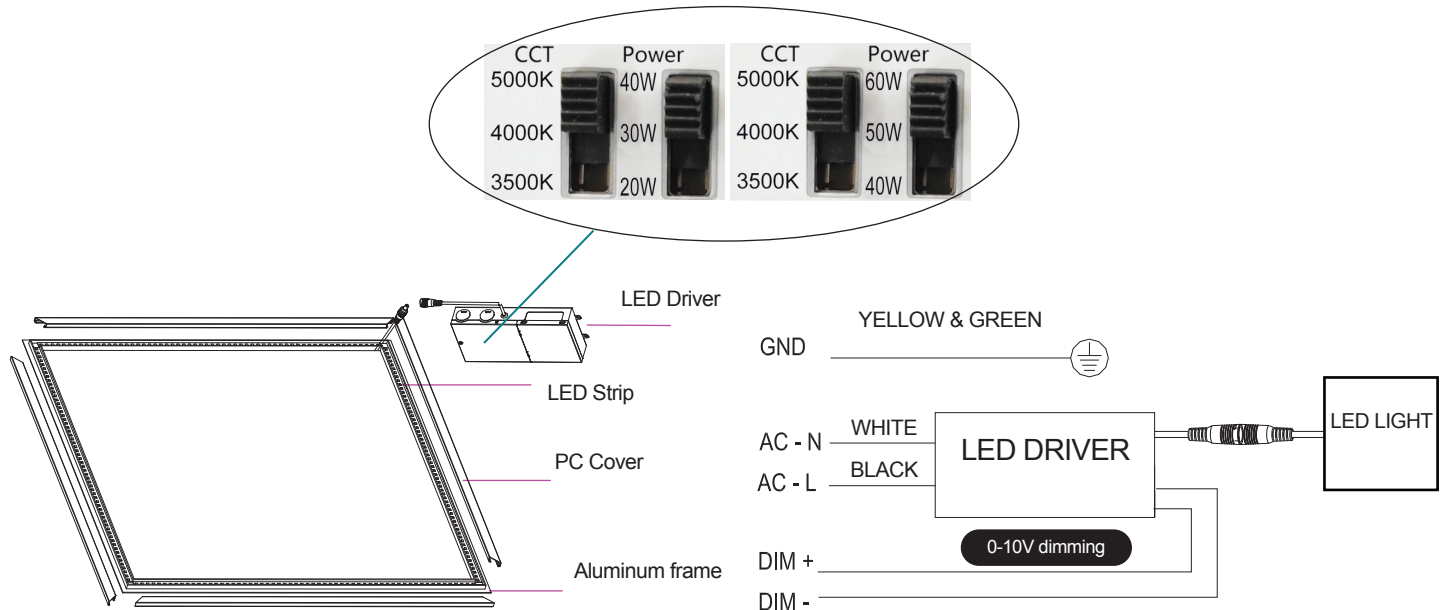

OPTIONAL:

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

