


DIVISION OF PITTCON ARCHITECTURAL METALS, LLC

T-LED Edge Light is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

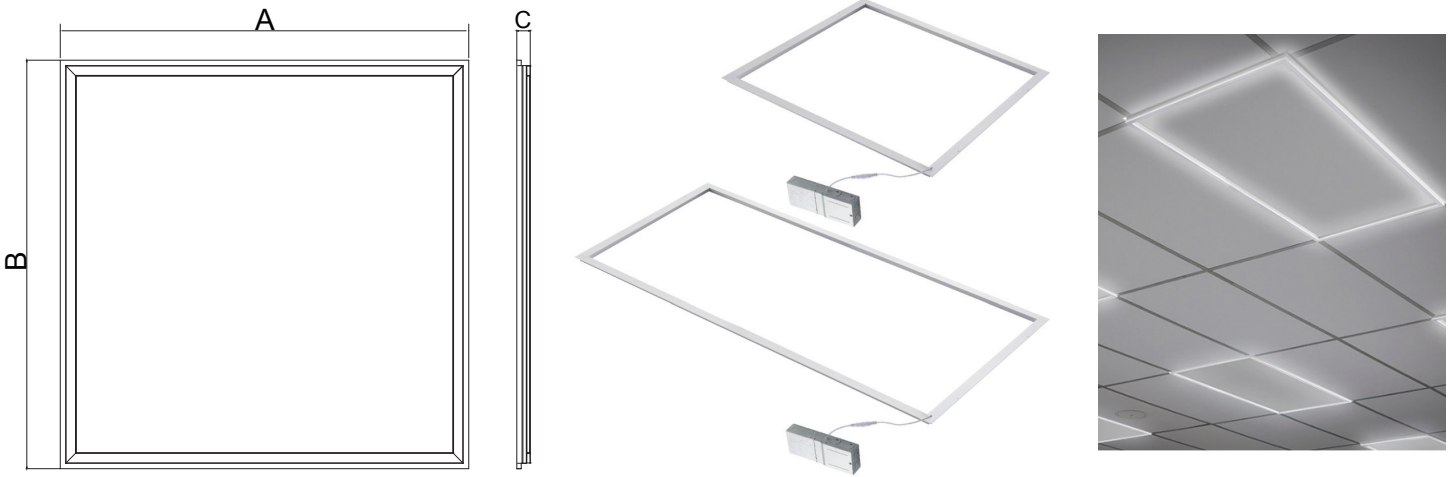

Dimensions	A	B	C
2x2	23.74" (603mm)	23.74" (603mm)	0.59" (15mm)
2x4	47.76" (1213mm)	23.74" (603mm)	0.59" (15mm)

Features

- Ideal replacement for traditional flat panels and troffers
- Non-flicker, no dark spots
- AC100-277V, 0-10V dimmable
- cETLus, DLC premium
- Ambient temperature: -20°C - 45°C
- Dry locations
- 5 year limited warranty

Residential Applications

- Kitchens
- Bathrooms
- Laundry rooms
- Pantries
- Rec Rooms

Commercial Applications

- Retail
- Offices
- Hallways
- Elevators
- Banquet Halls
- Restaurants

Specifications

Color Temperature	3000K / 4000K
Input Voltage	AC100-277V
Power Consumption (W)	2X2=40 Watts 2X4=55 Watts
Lumen Output	2X2=4800LM 2X4=6600LM
CRI	>80
LED Life	50,000 hours
Dimmable	0-10V
Beam angle	120°
Approvals	cETLus, DLC

Ordering Code


Size Wattage Color Temperature

TLE- - -

2x2 40 = 40 watts 30 = 3000K
2x4 55 = 55 watts 40 = 4000K

Project		Type	
Date		Contact	
Notes			

T-LED Edge Light is an innovative solution for general and accent lighting in offices, hallways and commercial applications. Its perimeter illumination offers a unique edge lit look, replacing the traditional flat panels and troffers.

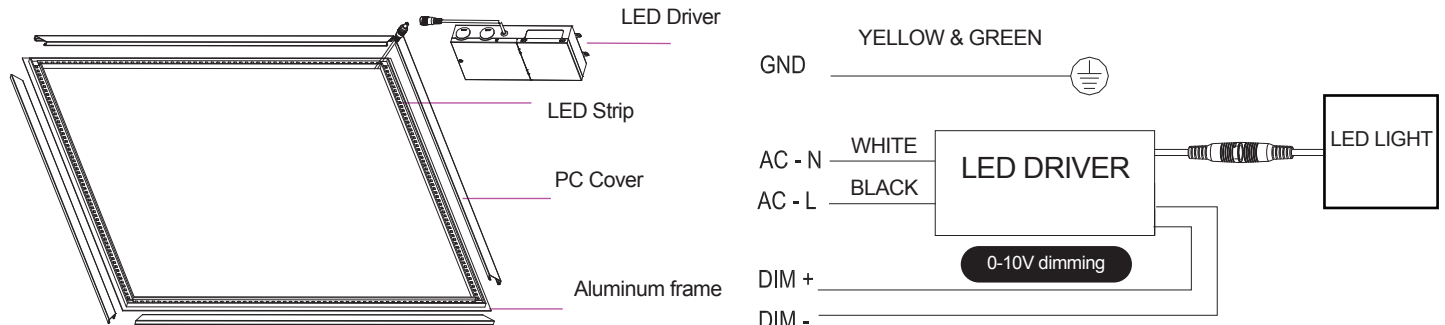

OPTIONAL:

NOTE: driver mount bracket (TLE-DM), and mounting clips (TLE-MC) are available (sold separately). Please check your local building codes, if these accessories are required.

